BRUHAT BANGALORE MAHANAGARA PALIKE

DASARAHALLI ZONE

Name of Work:-Improvements & Asphalting to road from Danavanthri clinic to Shiva Temple in Dasarahalli Ward No 15

			Est. Cost Rs				15.00	Lakhs	
Sl	Description of Item	Unit	No	L	B	D	Qty	Rate	Amount
1	KSRRB 300 - Excavation for road, drains and similar works - KSRRB 300-2. Earthwork excavation by manual means in hard soil involving an average horizontal throw upto 2 meters and an average lift upto 0.5 m, excavated surface leveled and sides neatly dressed, the disposed earth to be leveled neatly after breaking of clods complete as per specifications complete as per specifications. MORTH Chapter 3 (P.152/I.19.2 PW, P & IWTD - SR 2013-14)	Cum							
	UGD Cutting and Burms								
	Hesaragatta Main road to Dhanvanthri Clinic 6th Cross road		1	249.00	1.00	0.30	74.70		
	3rd Cross roads		1	260.00	5.00	0.25	325.00		
	Shiva Temple road		1	170.00	5.00	0.25	212.50		
	Desilting of Drains								
	Hesaragatta Main road to Dhanvanthri Clinic 6th Cross road		2	249.00	0.60	$\frac{0.25+0.45}{2}$	104.58		
	3rd Cross roads		2	260.00	0.60	$\frac{0.25+0.45}{2}$	109.20		
	Shiva Temple road		2	170.00	0.60	$\frac{0.25+0.45}{2}$	71.40		
							897.38	90.72	**81410.00**
	Basic Rate	84.00							
	Add Area Weightage 8%	6.72							
	Total	**90.72**							
2	KSRRB 500-2: Cleaning the existing black topped surface with brooms, soft brushes and finally dusting with old gunny bags and/or compressed air to receive bituminous treatment including cost of all materials, labour, HOM of machineries complete as per specifications. Specification No. KRBS 500-1 MORTH Chapter 5 **Page No. 175/ Item No. 21.2/ PWD SR 2013-14**	**Sqm**			**Avg**				
	Hesaragatta Main road to Dhanvanthri Clinic 6th Cross road		1	249.00	7.00		1743.0		

	3rd Cross roads		1	260.00	5.00		1300.0		
	Shiva Temple road		1	170.00	4.50		765.0		
	Basic Rate	2.40					**1743.0**	**2.59**	**4514.00**
	Area Weightage 8%	0.19							
	Total	**2.59**							
3	KSRRB M400-17: Providing, laying, spreading and compacting graded stone aggregate to **wet mix macadam** Specifications including premixing the material with water at OMC in mechanical mix plant carriage of mixed method of tipper to site, laying in uniform layers with paver in sub-base/base course on well prepared surface and compacting with vibratory roller to achieve the desired density complete as per Specifications.MORTH Specification No. 406 **Page No. 170/ Item No. 20.18/ PWD SR 2013-14**	**Cum**							
	Hesaragatta Main road to Dhanvanthri Clinic 6th Cross road		20	6.70	1.00	0.30	40.20		
	3rd Cross roads		15	5.45	1.00	0.30	24.53		
	Shiva Temple road		24	4.45	1.00	0.30	32.04		
						Total	**96.79**	**1121.04**	**108505.00**
	Basic Rate	1038.00							
	Area Weightage 8%	83.04							
	Total	**1121.04**							
4	KSRRB 500-7: Providing and applying tack coat on the prepared black topped surfaces at 5kg per 10 sqm, heating bitumen in boiler fitted with spray set (Excluding cleaning of road surface) including cost of all Materials, labour, HOM of machineries complete as per specifications. MORTH Chapter 5 **Page No. 176/ Item No. 21.8/ PWD SR 2013-14**	**Sqm**							
	Hesaragatta Main road to Dhanvanthri Clinic 6th Cross road		1	249.00	7.00		1743.0		
	3rd Cross roads		1	260.00	5.00		1300.0		
	Shiva Temple road		1	170.00	4.50		765.0		
	Basic Rate	20.10					**3808.0**	**21.71**	**82672.00**
	Area Weightage 8%	1.61							
	Total	**21.71**							

5	KSRR M500-17: Providing and laying **semi dense bituminous concrete 25mm thick** with 100-120 TPH batch type HMP producing an average output of 75 tonnes per hour using crushed aggregates of specified grading, premixed with bituminous binder at 4.5 to 5% of mix and filler, transporting the hot mix to work site, laying with a hydrostatic paver finisher with sensor control to the required grade, level and alignment, rolling with smooth wheeled, vibratory and tandem rollers to achieve the desired compaction as per MORTH Specification clause No. 500.8 complete in all respects as per specifications. With 80/100 grade bitumen using 40-60 HMP using Mechanical paver **Page No. 178/ Item No. 21.20.5/ PWD SR 2013-14**	**Cum**							
	UGD Cutting & Profile Correction								
	Hesaragatta Main road to Dhanvanthri Clinic 6th Cross road		1	240.00	2.75	0.025	16.50		
	3rd Cross roads		1	120.00	2.50	0.025	7.50		
	Shiva Temple road		1	182.00	2.50	0.025	11.38		
	Asphaltring for Road Portion								
	Hesaragatta Main road to Dhanvanthri Clinic 6th Cross road		1	240.00	6.80	0.025	40.80		
	3rd Cross roads		1	120.00	5.50	0.025	16.50		
	Shiva Temple road		1	182.00	4.30	0.025	19.57		
	Basic Rate	9069.00					**112.18**	**9794.52**	**1098749.00**
	Area Weightage 8%	725.52							
	Total	**9794.52**							
6	Carriage of Mixed Materials Page No. 186 Note PWD SR 2013-14			**Qty item no.6**			112.18	52.11	**5845.00**
	1st to2ndKM	5.75							
	2nd-5th KM	16.50							
	5th -10th KM	26.00							
		48.25							
	Area Weightage 8%	3.86							
	Total	**52.11**							
7	KSRRB M800-13. Road Marking with Hot Applied Thermoplastic Compound with Reflectrising Glass Beads on Bituminous Surface:- Providing and lying of hot applied Thermoplastic Compound 2.5mm thick including Reflectrising Glass Beads at 250 gms per Sqm area, thickness of 2.5 mm is exclusive of surface applied glass beads as per IRC:35. The finished surface to be level, uniform and free from streaks and holes complete as per specifications. MORTH Specification No. 803. Page No. 197/ Item No. 24.15/ S.R 2013-14								
	Hesaragatta Main road to Dhanvanthri Clinic 6th Cross road		2	240.00	0.10		48.0		
	3rd Cross roads		2	120.00	0.10		24.0		
	Shiva Temple road		2	149.00	0.10		29.8		
							101.85	471.96	**48069.00**
	Basic Rate	437.00							
	Area Weightage 8%	34.96							
	Total	**471.96**							

	Total	**471.96**							
9	Disposal of debris to the final place of disposal with all lead and lift and as direction by the engineer in charge of the work, lead 4 Km a) Basic rate for haulage of materials as per item No. 17.4/KSRRB : M100-4.1 ..... Rs. 2.00 Tonne/Km b) Average earth of work 1.28 Tonne/Km for Rs. 2.00/Km c) Add loading and unloading Page No. 150 Item No. 17.1 PWD SR 2013-14	Cum							
			Qty Vide Item No. 1				**897.38**	78.24	**70207.00**
	2 x 1.28 x 4 Kmtrs	10.24							
		62.20							
	Basic Rate	**72.44**							
	Add Area Weightage 8%	5.80							
	Total	**78.24**							
9	Miscellaneous and UnforessenCharges								**1817.00**
								Total	1500000.00

(Rupees. Fifteen Lakhs Only)

CERTIFICATE:-

1 The Work spot has been inspected and the work is found to be necessary
2 The Estimate is prepared as per the PW,P & IWTD -SR-2013-14
3 The Provision made in estimate are adequate and essential.
4 This area comes under BBMP limits.

Assistant Engineer
Ward-15

Assistant Executive Engineer
T. Dasarahalli Sub-Division
B.B.M.P

Executive Engineer
Dasarahalli Division
B.B.M.P. Bangalore.

ನಂ. JC(DH)/AS/283/13-14 ದಿನಾಂಕ 30/10/13
ರೂ. 15.00. Lakhs
Fifty Lakhs only
ಗಳ ಅಂದಾಜು ಪಟ್ಟಿಗೆ ಆಡಳಿತಾತ್ಮಕ ಮಂಜೂರಾತಿ ನೀಡಿದೆ
P.No - 241
S.No. 283
ಜಂಟಿ ಆಯುಕ್ತರು
ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆ
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು.

BB/DD/TS/199/13-14 ದಿನಾಂಕ : 30/10/13
ರೂ. 15.00 Lacs.
Fifteen Lacs only.
ಗಳ ಅಂದಾಜು ಪಟ್ಟಿಗೆ ತಾಂತ್ರಿಕ ಮಂಜೂರಾತಿ ನೀಡಿದೆ
P.No - 3/6
S.No - 199
ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ.ದಾಸರಹಳ್ಳಿ ವಿಭಾಗ
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು

(5)

Name of works:- Improvements & Asphalting to road from Dhanvanthri clinic to Shiva temple in Dasarahalli ward No. 15.

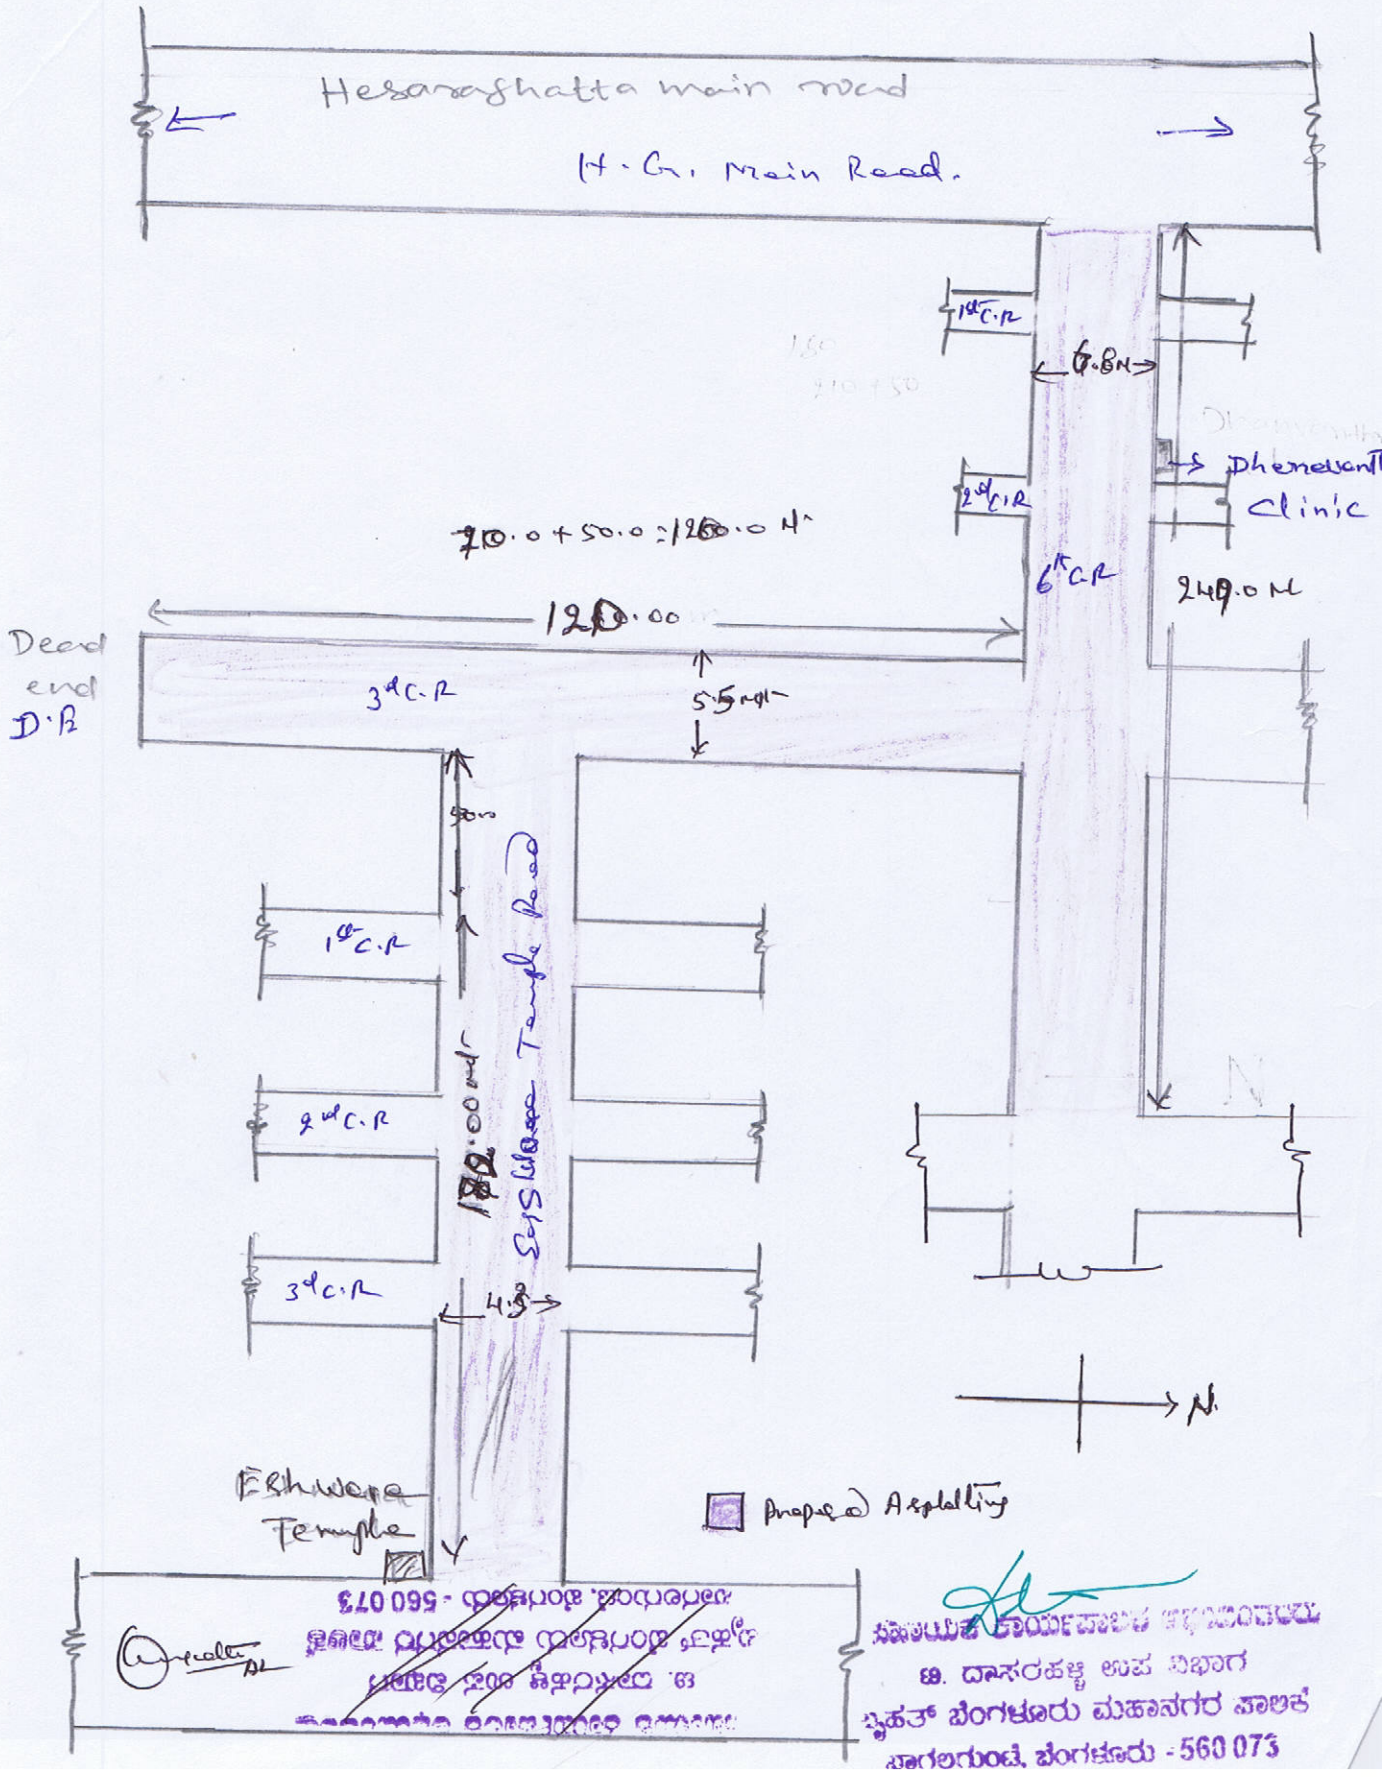

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಇಂಜಿನಿಯರ್
ಡಿ. ದಾಸರಹಳ್ಳಿ ಉಪ ವಿಭಾಗ
ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆ
ಯಶವಂತಪುರ, ಬೆಂಗಳೂರು - 560 073